

FLM-200 / Hanging Flame Light

Directions for Use

Hanging Application

For hanging, attach the provided chain by inserting the rings from the inside through the provided holes in the top rim. The rings then hook over the plastic tab. (See Photo #1)

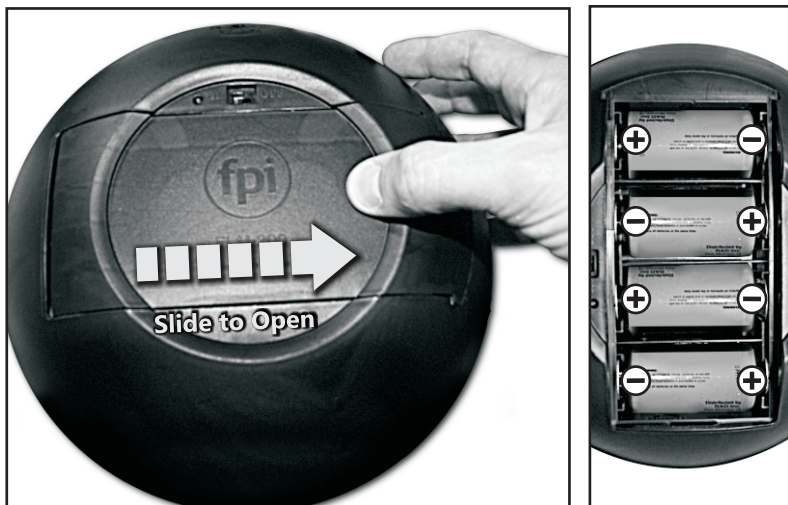


Table-Top Application

For table top use, it is recommended that the flame be at eye level when possible. For both hanging and table top, the flame looks most realistic when you cannot see into the bowl.



Battery Installation



Facing the bottom of the caldron with the "fpi" logo right side up, slide the battery cover to the right. Install 4 D cell batteries according to the diagram. For maximum battery life, always use a good grade of alkaline batteries.

Adapter Use

This product uses 6V DC current. Your adapter should be rated at least 1000mA. Remove batteries when using an adapter. Plug your adapter into the receptacle using the proper plug and polarity. If the product does not work immediately, the polarity of the plug may be wrong. Reverse the plug polarity according to the adapter instructions.

Silk Flame

It is the nature of this fabric to fray around the edges. This should not affect the visual or operational characteristics of the product. For future use, a replacement silk flame is provided. When changing or adjusting the silk flame, carefully separate the Velcro tabs. Do not pull the silk away from the Velcro as this will permanently damage the silk tabs.